IF J2H-2C(H)

Mercedes-Benz

Camera interface wiring diagram

1 2 3 4 5

To pin 4
of the white
connector
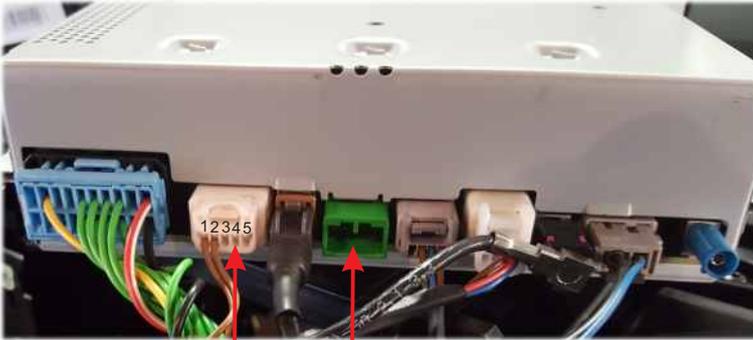
Daimler TCC Touch
Multimedia Radio

Black to
ground

Red to (+15)
+12V ~ 36V DC

Fuse 2A (Grey)

To side camera

Blue wire — Side camera trigger 10V ~ 36V

To rear camera

White wire — Rear camera trigger 10V ~ 36V

Green LED = ON
Trigger output
is active

Red LED = ON
Power shutter/heater is OK

Blue LED = ON
Side camera is ON

White LED = ON
Rear (Shutter) camera is ON

Input 10V ~ 36V DC | Trigger
Rear camera

Input 10V ~ 36V DC | Trigger
Side camera
(2 sec. OFF-delay)

Trigger out
Video out
Ground
+12V ~ 36V DC
(Fuse 2A grey)

MXN.

IF J2H-2C(H)