

MiMo5G

Multiband Cellular MiMo Antenna

Multiband antenna combining the cellular/mobile GSM(2G), UMTS(3G), LTE(4G), 5G NR(5G) and WiFi frequencies for vessel or land based communication.

- Two versions - 2x2 and 4x4
 - Up to four antenna elements in one enclosure
- Excellent performance, VSWR below 2.5 in 96% of the specified band
- Omni-directional design
- Designed for Maritime use
- Compact and light weight design

ELECTRICAL SPECIFICATIONS

Type	End-Fed Multiband Co-linear MiMo
Frequency	617 - 960 MHz, 1710 - 2170 MHz, 2300 - 2690 MHz, 3300 - 4200 MHz, 4400 - 5000 MHz
Bands	5G NR 600/700/800/900/1800/2100/2600/3500/3700/4900 MHz LTE 700/800/1800/1900/2600 MHz UMTS 700/800/900/2100 MHz GSM 850/900/1800/1900 MHz WiFi 2.4 GHz
Bandwidth	See "FREQUENCY"
Impedance	50 Ohm
VSWR	< 4.0:1 (617-698 MHz) < 3.0:1 (698-960 MHz/1710-2690 MHz) < 2.0:1 (3300-4200 MHz/4400-5000 MHz)
Isolation	> 10 dB
Gain	-1.0 dBd, 1.15 dBi, 2.0 dB (Marine) (617-960 MHz) 1.0 dBd, 3.15 dBi, 4.0 dB (Marine) (1710-2170, 2300-2690 MHz) 2.0 dBd, 4.15 dBi, 5.0 dB (Marine) (3300-4200, 4400-5000 MHz)
Polarisation	Vertical
Radiation Pattern	Omni-directional
Max. Input Power	10 W (per element)




Datasheet

2 / 3

MECHANICAL SPECIFICATIONS

Color	White and black
Length	MiMo5G-2: 455 mm MiMo5G-4: 785 mm (Excluding cables)
Weight	MiMo5G-2: 460 g MiMo5G-4: 840 g
Mounting	Integrated 1-14"NF Male Thread
Mounting Place	On mast or deck (see P/N; 10000-173 & 10000-183)
Materials	UV Protected PC, PTFE, PE, PCB and chromed solid brass
Survival Wind Speed	55 m/s (125 mph)
Operating Temperature	-40 °C to +70 °C
Connector	SMA-male (Other types available on request)
Cable	Approx. 0.5 m LTR195
Ingress Protection	IP65
Serial No.	On product label

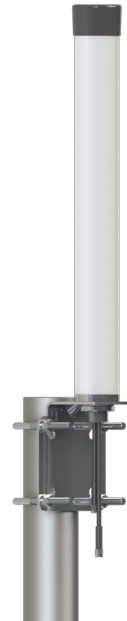

ORDERING INFORMATION

18102-002	MiMo5G-2 2 x LTR195 + SMA-male
18104-002	MiMo5G-4 4 x LTR195 + SMA-male

PACKAGING INFORMATION

Type	Tube
Size	MiMo5G-2: Ø60 x 555 mm MiMo5G-4: Ø60 x 950 mm

Datasheet

